JAKI

佳岛

SINCE 1999

无缝设备

SEAMLESS BONDING MACHINE

佳岛在手中，缝纫好轻松!
A stitch above the best!

浙江佳岛缝纫机有限公司

ZHEJIANG JIADAO SEWING MACHINE CO.,LTD.

浙江省科技型中小企业
Zhejiang science and technology SMS enterprises

安全生产标准化
Safety production standardization

ISO14001环境管理体系认证证书
Environmental management system certificate

ISO9001质量管理体系认证
ISO9001 Quality management system certificate

台州市著名商标
Taizhou Well-known trademark

税收贡献企业
Tax contribution enterprise

2012年度荣获创新成长型企业
In 2012, its granted "Innovation growth enterprise"

CE证书
CE certificate



中国缝制机构协会团体会
China sewing machinery association members

产品质量承诺单位荣誉奖状
Quality and Accredit Honoring Unit award

不锈钢缝台实用新型专利证书
With stainless steel plate patent No. for utility model
专利号：ZL 03 2 22168.1
专利设计 仿冒必究
Patent Design, Imitation Is Not Permittsd

高速包缝机滤油装置新型专利证书
High-speed overlock sewing machine oil filter device new patent certificate
专利号：ZL2004 2 0027753.3
专利设计 仿冒必究
Patent Design, Imitation Is Not Permittsd

缝纫机自动抬压脚机构专利证书
专利号：ZL 2014 2 0442329.9
ZL 2013 3 0314096.5
专利设计 仿冒必究
Patent Design, Imitation Is Not Permittsd

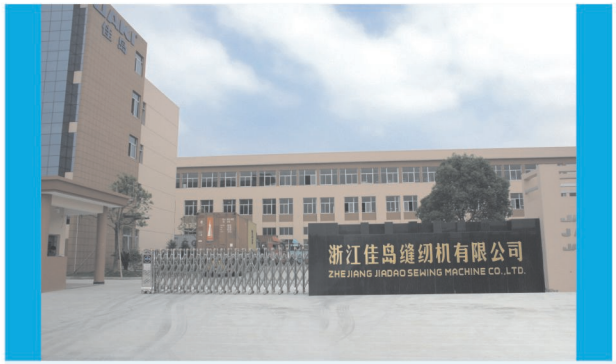

佳岛因您而精彩！Client is the boss, You brighten Jaki !

JAKI 佳岛

牵手佳岛，绿动未来！
Join in JAKI,Roll in Future!

浙江佳岛缝纫机有限公司创建于1999年，经过十几年的励精图治和稳步前进，已快速成为中国缝制行业的知名品牌，成功跻身行业前列。2013年，公司搬迁至台州椒江滨海开发区，成立产品研发中心和生产物流基地，占地面积50亩，拥有4万平方米的现代化标准厂房，年生产能力达到30万台。公司销售网点遍及中国大陆各省市、自治区，并远销亚、非、中东、拉美及欧洲全球各大地区。

公司自创立以来，坚持“开拓创新，顾客第一“的企业核心理念。自主研发创新具有世界先进水平的高科技产品，取得多项新型实用专利证书并荣获多项科研成果。被授予《全国乡镇企业先进单位》,企业资信等级AA+级,《创新成长型企业》称号和重质量守信誉单位》，并荣获《中国驰名商标》称号。

ABOUT JAKI
关于佳岛

Zhejiang JIADAO sewing machine Co., ltd. A Sino foreign joint venture, established in 1999, After more than a decade of hard working and steady development, have rapidly become the well-known brand of sewing industry in China, successful come into leading position of the industry. In 2012, JAKI factory move to Taizhou jiaojiang industrial zone, we collect land 5 acres to build product R&D center and logistics base, covers an area of 5 acres with 40,000 square meters of modern standard workshop, Annual production capacity up to 300,000 sets. its products are sold to all over the mainland China, and exported to Asia, Africa, middle east Latin America and Europe regions around the world.

It's a trusted brand with the slogan "innovation, people-oriented", Independent research and develop the world's advanced level of high-tech products, finished a number of new practical patent projects and made many achievements in scientific research. In 2003, it was awarded the Advanced Unit of Township Enterprises in China and gained the AA+ Grade Credit Enterprise, in 2012, its granted 'Innovation growth enterprise' And 'Integrity commitment Enterprise' and has been evaluated as the 'Quality and Accredit Honoring Unit' for many times. In 2013, JAKI is awarded 'China Well-Known Trade mark'

JAKI
佳 岛

无缝设备是无缝服饰的一种生产设备，利用热熔胶膜经过无缝设备将面料粘合一起，粘合的服饰效果平整、柔软、不伤衣物纤维。粘合部位密封性好、防水、防风。一些户外服、功能外套、泳衣、内衣等服饰都可以用无缝设备来制作。伸缩性大的服饰用无缝设备可以保持面料原有的伸缩度。

JR880-5无缝设备-拼贴机

SEAMLESS BONDING MACHINE--Collage Machine

适用范围：

1、无缝文胸、运动围贴橡筋
2、无缝文胸包边、折边
3、无缝文胸粘合钢圈套
4、冲锋衣、运动衣、户外服装包边/折边
5、无缝鞋包边/折边

Applicable scope:

1.Seamless underwear
2.Seamless underwear folding and bonding
3.Seamless steel ring of underwear
4.Seamless outdoor wear,Mountain wear folding and bonding
5.Seamless shoes folding and bonding

参 数 Parameter:

机 型 Model	JR880-5
主要功能 Main function	拼贴、包边、折边 Collage/hemming/folding edge
压脚驱动方式 Driving method	气缸驱动 Air cylinder driven
适用缝料 Using fabric	锦纶、氨纶 nylon,spandex
使用胶膜 Film	热熔胶膜 Hot melt adhesive film
送料方式 Feeding method	上下滚轮 upper and lower roller
送料速度 Feeding speed	0 - 8m/min
压脚提升高度 Presser foot lift	10mm
压缩空气压力 Comperssed air pressure	0.5Mpa
输入电压 Voltage	220VAC
频率	50/60Hz
最大功率 N.W	1900W
净 重 G.W	74kg
毛 重 Carton size	102kg
包装尺寸	1205x545x1215mm

佳岛在手中，缝纫好轻松!
A stitch above the best!

特 点 Feature:

1、作业空间大，操作舒适，提高工作效率；
Big operation space,easy work for everyone,greatly improve the working efficiency.

2、立柱式下送料；
With pillar down feeding.

3、上下送料速度可调节；
The up and down feeding speed can be adjusted.

4、进口硅胶带送料，使用寿命更长；
Imported Silica gel feeding,longer lifetime.

5、触摸屏操作，简单易用。可存储20个用户程序；
It can be operated easily through touch screen.20 kinds of user programs can be stored.

6、调压过滤装置，分离气源中的油、雾，减少对零部件侵蚀；
It with adjust pressure filter device,the oil and fog from air source can be separated to reduce corrosion of spare parts.

7、膝控装置，传送比切换更便捷；
It with knee control differential function,easy switch for Transfer ratio.

8、布线清晰规范，方便维护；
Wire tidy in control box to ensure check up and service conveniently.

880-5系列：

880-5/D 拼贴机 Collage Machine

用于两片裁片的拼贴粘合
It's suitable for collage two cutting pieces.

880-5A/D 拼贴机 Collage Machine

用于手套拼贴粘合
It's suitable for collage gloves.

880-5B/D 拼贴机 Collage Machine

用于鞋类拼贴粘合
It's suitable for collage shoes.

特殊机型可定制
Special models can be costomized

JAKI 佳岛

佳岛在手中，缝纫好轻松！
A stitch above the best!

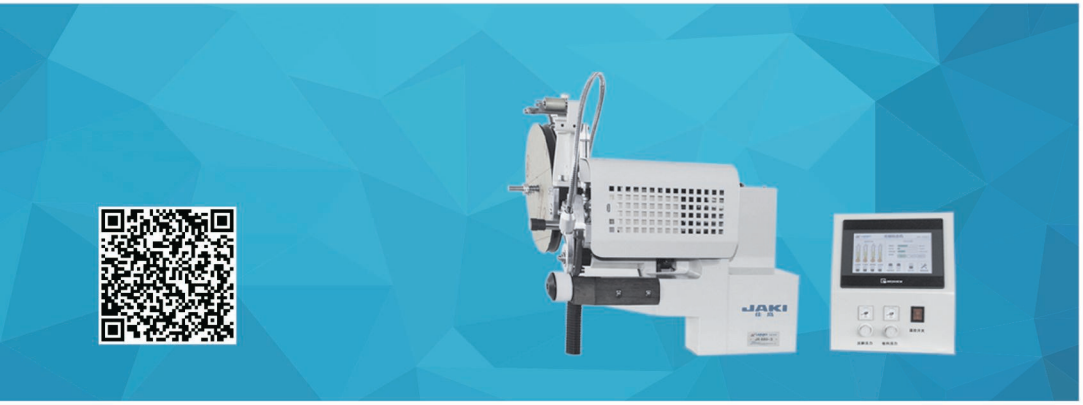

JR880-3无缝设备-贴胶机

SEAMLESS BONDING MACHINE--Adhesive Film Fusing Machine

适用范围：

1、无缝文胸上胶 贴胶
2、无缝裤上胶 贴胶
3、冲锋衣、户外、泳衣、单车服上胶、贴胶

Applicable scope:

1.seamless underwear adhesive glue tape
2.seamless lingerie adhesive glue tape
3.seamless outdoor, swimming wear, bicycle wear ect adhesive glue tape

参 数 Parameter:

机 型 Model	JR880-3
主要功能 Main function	修边、贴胶 trimming edges, paste glue tape
使用薄膜 Film	热熔胶膜 Hot melt adhesive film
压脚驱动方式 Driving method	气缸驱动 Air cylinder driven
压缩空气压力 Compersed air pressure	0.5Mpa
输入电压 Voltage	220VAC
适用缝料 Using fabric	锦纶、氨纶 nylon,spandex
送料方式 Feeding method	上下滚轮 upper and lower roller
送料速度 Feeding speed	0 - 8m/min
压脚提升高度 Presser foot lift	10mm
最大功率 Max power	3200W
净 重 N.W	80kg
毛 重 G.W	108kg
包装尺寸 Carton size	1205*545*1215mm

特 点 Feature:

1、触摸屏操作，直观易用，可存储20个用户程序；
It can be operated easily through touch screen.20 kinds of user programs can be stored.

2、上下滚轮送料，可调节差动，保证缝料平整；
Up and down roller feeding,it can adjust differential to ensure feeding stable.



3、带冷却合金钢切刀，修边效果更好，使用寿命更长；
With alloy steel cutter,better effect of trim fabric edge, longer lifetime.

4、双电机输送胶条
Double motor feed glue tape.

5、专利设计热风炉，噪音同比更低，热风量同比更大；
The patented design hot-blast heater,lower noice,bigger hot-blast air.

6、热风装置-上吹风（可保持胶条温度）
The hot blast air device - up blowing air can keep the temperature of glue tape.

7、手滑开关，气源开关更方便；
Slide Switches,air switch is more convenient.

8、调压过滤装置，分离气源中的油、雾，减少对零部件的侵蚀；
It with adjust pressure filter device,the oil and fog from air source can be separated to reduce corrosion of spare parts.

9、膝控装置，传送比、差动比切换更方便
It with knee control differential function,easy switch for Transfer ratio and differential ratio.

10、布线清晰规范，方便维护；
Wire tidy in control box to ensure check up and service conveniently.

880-3系列：

880-3/BT 贴胶机 25×25 Adhesive Film Fusing Machine

加长导料块，外置吹热风，胶条加热部分宽度可调
lengthen feeding block，external blowing hot air,the width of glue tape heating are a can be adjusted.

880-3/BT 贴胶机 45×45 Adhesive Film Fusing Machine

内置热吹风，胶条加热部分宽度可调
internal blowing hot air,the width of glue tape heating area can be adjusted.

880-3A/BT 贴胶机 Adhesive Film Fusing Machine

双电机输送胶条
Wire tidy in control box to ensure check up and service conveniently.

JAKI
佳 岛

JR880-2无缝设备-贴胶机

SEAMLESS BONDING MACHINE--Adhesive Film Fusing Machine

适用范围：

1、无缝裤 贴胶
2、橡筋 弹力纱双面 套胶
3、冲锋衣 户外防水面料 贴胶
4、泳衣 骑行服 贴胶

Applicable scope:

1.Seamless lingerie paste glue tape
2.Rubber string/spandex yarn double side bonded
3.Mountain Wear, Outdoor waterproof fabric paste glue tape
4.Swimming wear, bicycle wear paste glue tape

参 数 Parameter:

机 型 Model	JR880-2
主要功能 Main function	修边、贴胶 trimming edges, paste glue tape
使用薄膜 Film	热熔胶膜 Hot melt adhesive film
压脚驱动方式 Driving method	气缸驱动 Air cylinder driven
压缩空气压力 Compersed air pressure	0.5Mpa
输入电压 Voltage	220VAC
适用缝料 Using fabric	锦纶、氨纶 nylon,spandex
送料方式 Feeding method	上下硅胶带 upper and lower silica gel tape
送料速度 Feeding speed	0 - 8m/min
压脚提升高度 Presser foot lift	10mm
最大功率 Max power	2400W
净 重 N.W	79kg
毛 重 G.W	107kg
包装尺寸 Carton size	1205*545*1215mm

特 点 Feature:

1、触摸屏操作，简单方便，可储存20种用户程序
It can be operated easily through touch screen.20 kinds of user programs can be stored.

2、采用带风冷合金钢切刀装置，切布范围广，高品质保障
With alloy steel cutter,broad cutting scope,high quality.

3、采用进口硅胶带送料装置，防滑，防黏连，使用寿命长
Adopt imported Silica gel feeding device to ensure antiskid, anti-adhesion,long lifetime.

4、步进电机驱动剥纸装置，效果更稳定，控制更精确
Release paper device adopt stepper motor,more stable & accurate.





5、标配胶条输送装置，工作效率愈发提升
Adopt standard configuration glue tape feeding device, Greatly improve the working efficiency.

6、采用无刷电机切刀装置，切布边稳定，品质更保障且噪音小、寿命长
Adopt brushless motor cutter device to ensure cutting fabric edge stable,high quality,low noise,long lifetime.



7、采用可调节差动双步进电机，适用范围广，防布料偏移、错位；布料平整度有保障
Adopt adjustable differential double stepper motor to ensure prevention fabric shifting & malposition wide range of application.

8、配备调压过滤装置，气源中的油、雾自动分离，安全环保，防气缸腐蚀、更耐磨
It with adjust pressure filter device,the oil and fog from air source can be separated automatically,safety and environmental protection.prevent cylinder corrosion, more wearable.

9、配备膝控差动功能，简单易控
It has knee control differential function, easy work for everyone.

10、采用全铝一体的机身设计，散热快，运转性能更稳。
Machine body is Aluminium, cooling performance,work more stable

880-2系列：

880-2A/A 折边机 Folding Machine

大缝台（尺寸可定制），用于两片裁片的拼贴粘合
big operation plate （can customize size），it's suitable for collage two cutting pieces.

880-2B/A 折边机 Folding Machine

大缝台、加长加热块（尺寸均可定制）
加长加热区，贴合效率更高
big operation plateform, lengthen heating block（can customize size）
lengthen heating area offer a better working efficiency

880-2C/BT 贴胶机 Adhesive Film Fusing Machine

加长加热块（尺寸可定制），加长加热区，贴合效率更高
lengthen heating block（can customize size），lengthen heating area offer a better working efficiency

JR880-1无缝设备-折边机
SEAMLESS BONDING MACHINE--Foldng machine

适用范围：

1、无缝裤贴胶
2、橡筋、弹力纱双面套胶
3、冲锋衣、户外防水面料贴胶
4、泳衣、骑行服贴胶

Applicable scope:

1.Seamless lingerie paste glue tape
2.Rubber string/spandex yarn double side bonded
3.Mountain Wear, Outdoor waterproof fabric paste glue tape
4.Swimming wear, bicycle wear paste glue tape

参 数 Parameter:

机 型 Model	JR880-1
主要功能 Main function	包边、折边 hemming/folding edge
使用薄膜 Film	热熔胶膜 Hot melt adhesive film
压脚驱动方式 Driving method	气缸驱动 Air cylinder driven
压缩空气 压力 Compersed air pressure	0.5Mpa
输入电压 Voltage	220VAC
适用缝料 Using fabric	锦纶、氨纶 nylon,spandex
送料方式 Feeding method	上下特氟龙带 upper and lower teflon tape
送料速度 Feeding speed	0 - 8m/min
压脚提升高度 Presser foot lift	10mm
最大功率 Max power	650W
净 重 N.W	57kg
毛 重 G.W	98.5kg
包装尺寸 Carton size	1205*545*1085mm

880-1系列：

880-1/A 折边机 Folding Machine

加热区域加宽，以适应宽腰头服装，送料带尺寸 40×40mm

widen heating area to suitable for wide waist.feeding belt size: 40×40mm



880-1/C 包边机 Hermming Machine

增加拉筒，完成包边作业

add slide, it can fold edge

880-1A/A 折边机 Folding Machine

小缝台，适应小圆筒部位，送料带尺寸 25×25mm

small work platform suitable for cylinder part,feeding belt size: 25×25mm

JR850-2无缝设备-自动平压机
SEAMLESS BONDING MACHINE--Adhesive Film Fusing Machine

适用范围：

1、无缝用于皮裤、男装内裤腰头部位的加固贴合；
2、无缝衣、裤、防水服、运动服等服装的胶膜裁贴合片；
3、袋位、对叠骨位的加固贴合。

Applicable scope:

1.Suitable for strengthening waist of chaparajos,men's underwear.
2.Suitable for adhesive film cutting pieces on seamless clothes,pants,waterproof garment and sports wear.
3.Suitable for strengthening pocket and fold position

参 数 Parameter:

机 型 Model	JR850-2
主要功能 Main function	平压加固
压脚驱动方式 Driving method	气缸驱动 Air cylinder driven
压缩空气压力 Comperssed air pressure	0.5Mpa
输入电压 Voltage	220VAC
适用缝料 Using fabric	锦纶、氨纶 nylon,spandex
送料方式 Feeding method	滚轮送料杆 upper and lower roller
送料速度 Feeding speed	0 - 8m/min
压脚提升高度 Presser foot lift	10mm
压板动作高度	75mm
模压区 Max power	250mmX150mm
最大功率	3200W
净 重 N.W	307kg
毛 重 G.W	350kg
包装尺寸 Carton size	1205*535*1800mm

特 点 Feature:



1、缝料自动输送；
Providing with automatic fabrics feeding system.

2、上下加热块，提高工作效率
Up and down heating can improve the working efficiency.

3、发泡硅胶工作台，贴和效果更好；
Foamed silica gel operate platform offer a better bonding.

4、可调整缝料支撑架，适应服装不同码数；
It can adjust bracket of fabrics according different cloth size.

更多新品正在研发中……
More and more new products are under research